


Manual for owners and skippers



Sailing yacht „BAVARIA 44vision“

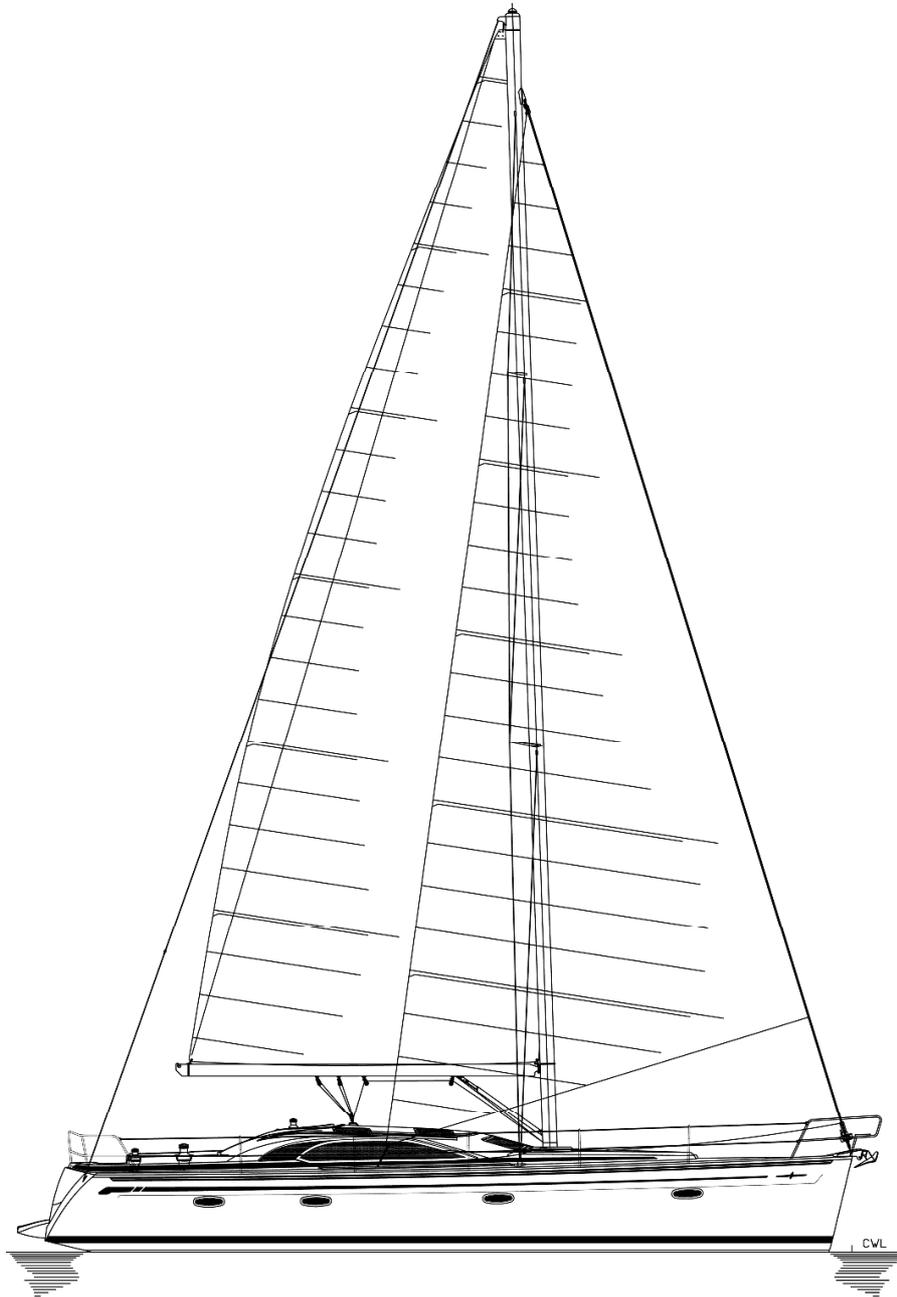

Bavaria Yachtbau GmbH • Bavariastr. 1 • D – 97232 Giebelstadt
Tel.: +49 (0) 9334 942 – 0; Fax: +49 (0)9334 942 – 116
E-Mail : info@bavaria-yachtbau.com

Introduction	4
Category of design	5
Builder's plate	5
Warnings	6
Declaration of Conformity	7
1. Description of the yacht	11
1.1 Main particulars	11
1.1.1 Principal dimensions	11
1.1.2 Displacement and weights	11
1.1.3 Motorization	11
1.1.4 Electrical installation	11
1.1.5. Tank capacities	11
1.1.6. Fixing points for cranes, resting-points for slipping and transport	11
1.2 General arrangement	12
1.2.1 Rigging plan	12
1.2.2 Deck arrangement	13
1.2.3. Accommodation plan	15
1.3 Drive systems	16
1.3.1 Sails	16
1.3.2 Rigging	16
1.3.3 Motorising, engine room, gear, and propeller	16
2. Installations and circuits	18
2.1 Tanks and piping - water	18
2.1.1 Fresh water, drinking water –cold	18
2.1.2 Sea-water circulation	18
2.1.3 WC –installation: see enclosed directions for use	19
2.2 Tanks and piping - fuel	20
2.3 Steering gear	20
2.3.1 Description of the system	20
2.3.2 Rudder blade and rudder bearings	20
2.4. Bilge pumps, bilge pipes	22
2.4.1 Description of the pumping arrangement	22
2.5 The electric installation	23
2.5.1 The AC-installation	23
2.5.2 The DC–board net	23
2.5.3 Operating the installation and specific features	23
2.5.4 Important warnings on the DC-installation	24
2.5.5 Important warnings on the AC-installation	24
2.5.6 Distribution of electric devices:	25
2.5.7 Wiring plans	27
2.5.8 Distribution plans	27
2.5.9 AC-distribution	27
2.6 L.P.G. installation	27
2.6.1 The components	27
2.6.2 Operation	28
2.7 Fire protection	28
2.8 Anchor (option)	30
2.9 Engine cooling system	30
2.10 Exhaust gas system	30

<i>2.11 Ventilation/Airing</i>	31
<i>2.12 Board ducts, sea water valves</i>	31
<i>2.13 Generator (Option for 44vision, 50vision, 50 Cruiser)</i>	32
3. Environmental protection	33
<i>3.1 Fuel and oil</i>	33
<i>3.2 Waste</i>	33
<i>3.3 Sound</i>	33
<i>3.4 Swell</i>	33
<i>3.5 Exhaust gas</i>	33
<i>3.6 Antifouling coatings</i>	33
<i>3.7 Varnish removers</i>	33
4. Maintenance	34
<i>4.1 Maintenance, cleaning</i>	34
<i>4.2 Wearing- and spare parts</i>	35
<i>4.3 Repair work</i>	35
<i>4.4 Winter storage</i>	35
5. Final remarks and notes	37
6. List of manuals supplied	38

Introduction

This manual will help you to handle your yacht safely and with pleasure. Apart from information about the yacht itself and installed or additionally supplied fittings the manual also contains information on operation and maintenance. Please familiarise yourself with everything before you go on your first voyage.

If this is your first yacht or if you are not really familiar with the special characteristics of a motor yacht please make sure you get proper training before you put it into operation. Do not hesitate to contact the dealer or our shipyard for information about further training possibilities.

As the scope of supply depends on the order, the equipment of your yacht can deviate with some descriptions and illustrations. In order to be able to adapt our yachts to the constantly progressing technical standard, we must reserve ourselves changes in form, equipment and technology. For these reasons no requirements can be derived from all data, illustrations and descriptions in this manual.

**PLEASE KEEP THIS MANUAL IN A SAFE PLACE
AND HAND IT OVER TO THE NEW OWNER IF YOU SELL THE YACHT.**

BAVARIA would like to welcome you to the circle of **BAVARIA** owners and would like to thank you for placing your confidence in our products by acquiring this yacht.

Your contract partner and the management and staff of Bavaria Yachtbau GmbH hope you will enjoy your new yacht.

Bon voyage, fair winds and fine weather.

BAVARIA Yachtbau GmbH
Management



W. Herrmann

Category of design

Following the European Recreational Craft Directive each boat has to be classified according to a category of design.

All sailing yachts of BAVARIA belong to the category of design A,

Designed for extended voyages where conditions may exceed wind force 8 (Beaufort scale) and significant wave heights of 4 m and above but excluding abnormal conditions, and vessels largely self-sufficient.

Certification

Actually the EC Directive intends for yachts of this size the certification module **Aa** only. That means that the manufacturer certifies the correspondence of construction and equipment with the Directive itself but stability and buoyancy is checked by another notified body.


IMCI (International Marine Certification Institute) located in Bruxelles was put into charge as a notified body (see: Declaration of Conformity).

Identification

The hull identification was formed into the transom on starboard side. This is a unique sequence of digits and letters.

Builder's plate

The builder's plate on the front wall of the cockpit is a demand of the Directive because certain information are required which will be explained in the following.

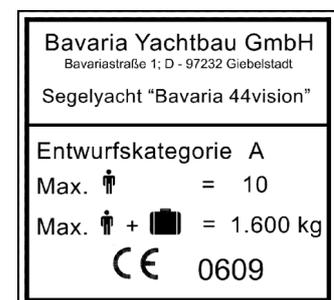

Explanations

- **Category of design A** : Ocean
- **Max.  =10** : Maximum number of persons recommended by the manufacturer if the yacht is situated in the sea area corresponding to the category of design. The number of crew can be increased under consideration of the maximum additional loading capacity if the yacht is on a voyage in non-ocean areas.
- **Max  +  = 1600 kg** : Maximum additional loading including 10 persons, stores, provisions and personal equipment (excluding tank capacities).
- **CE 0609** : CE marking which indicates the conformity of the yacht with all provisions of the Directive. The sequence of digits is the code number of the certifying body, in this case the **IMCI (International Marine Certification Institute)** (see: Declaration of Conformity).

Warnings

Many chapters of this manual will support a trouble free operation, maintenance or draw your attention to signs of dangers. To find them more easily they are especially marked (in boxes or in bold). We advise you to study them carefully although the experienced skipper might be quite familiar with many of them.

The following chapters contain such warnings/notes or other important information for operating the yacht.



Always consider the maritime duty to exercise diligence!



Danger

Means, that an extreme real hazard which will lead to the death or too irreparable injuries with great probability exists if no adequate precautions are found.



Warning

Means, that a hazard which can lead to injuries or death exists if no adequate precautions are found.



Caution

Means, that a memory of safety measures or the attention judges on handling, which can be unsure or lead to personal injuries or to harm of the vessel or from components.



INTERNATIONAL MARINE CERTIFICATION INSTITUTE

International Non-Profit Association

Rue Abbé Cuypers 3 / B-1040 Bruxelles / Belgique / +32 2 741 6836 / +32 2 741 2418
www.imci.org / info@imci.org

EC-TYPE EXAMINATION CERTIFICATE

We hereby certify that the product below manufactured by

Bavaria Yachtbau GmbH

Bavariastr. 1 - D-97232 GIEBELSTADT - GERMANY

Recreational Craft

BAVARIA 44VISION

Scope	Design & Construction
Module type	B
Boat type	Sail
Boat design category	A
Length of hull [m]	12,99
Beam of hull [m]	4,39
Draught, maximum [m]	2,1
Loaded displacement mass [kg]	12900
Maximum rated engine power [kW]	58
Number of persons recommended	10
Maximum recommended load [kg]	1600
Certificate number	BBAV040

meets the requirements of the Recreational Craft Directive 94/25/EC as amended by 2003/44/EC



Ulfen Heinemann
Ulfen Heinemann (Managing Director)
for EU - Notified Body : 0609

2006-10-20

This certificate is valid for craft identified as a
2007 or 2008 model

References to the relevant standards used are given on the Declaration of Conformity



NBN EN 45011 accredited organisation - Certificate No 070 PR

1. Description of the yacht

1.1 Main particulars

1.1.1 Principal dimensions

Length overall	L _{OA}	13.70 m	Length of hull	L _H	12.99 m
Length on waterline	L _W	11,50 m	Breadth max.	B _{max}	4,39 m
Draught - normal keel	D _{max}	abt 1.80 m	Draught - leadkeel	D _{max}	abt 2.10 m
Headroom (without antenna and similar things)			H _D	abt	22,00 m
Headroom (for transport)			H _T	abt	4,00 m

1.1.2 Displacement and weights

Weight of the empty yacht -incl. safety equipment	10.400 kg
Weight of the fully equipped yacht- ready for sailing with crew (normal keel)	12.900 kg
Ballast normal keel	3.800 kg

1.1.3 Motorization

Diesel engine:	
Manufacturer: Volvo	Type: D2-55 Output 41 kW
Cooling	indirect (sea-/fresh-water)
Reverse-reduction gear	Saildrive 130 S reduction ratio 2.19 : 1
Propeller:	3-bladed fixed propeller, aluminium alloy (option: folded propeller)

1.1.4 Electrical installation

220/110 V (option) AC-installation

Shore connection (option)	socket CEE-plug	current operated	230 V earthed socket
Battery charger (option)	230 V AC / 12 V DC with 27 A max. current (option)		

12 V DC-system

1 x engine battery 12 V 55 Ah 1 x bord battery (option 2 x) 12 V 140 Ah
 Motor generator (alternator) battery charger
 The distribution occurs about switchboard, electric circuits with electronic protective switches and LED.


1.1.5. Tank capacities

1 fresh water tank	abt 210 l	on port side below the aftcabin berth.
1 fuel tank	abt 210 l	on starboard side below the aftcabin berth.
1 fresh water tank	abt 250 l	into the bow.
1 holding tank I	abt 70 l	
1 holding tank II	abt 70 l	
1 gas cylinder (option)	abt 3 kg (Butane)	in cockpit

1.1.6. Fixing points for cranes, resting-points for slipping and transport




Attention
 The rear webbing will be placed in the area of the sail drive.

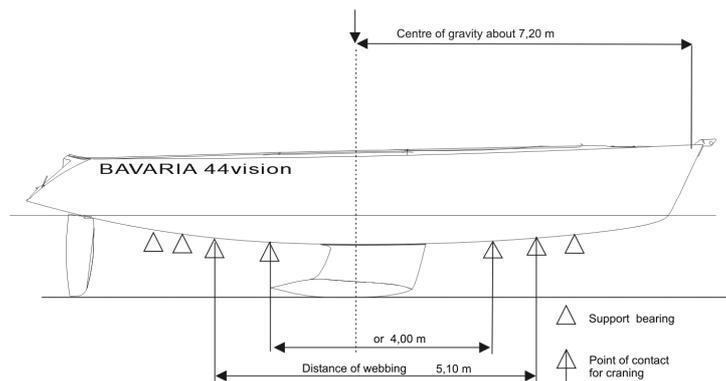

1.2 General arrangement

1.2.1 Rigging plan

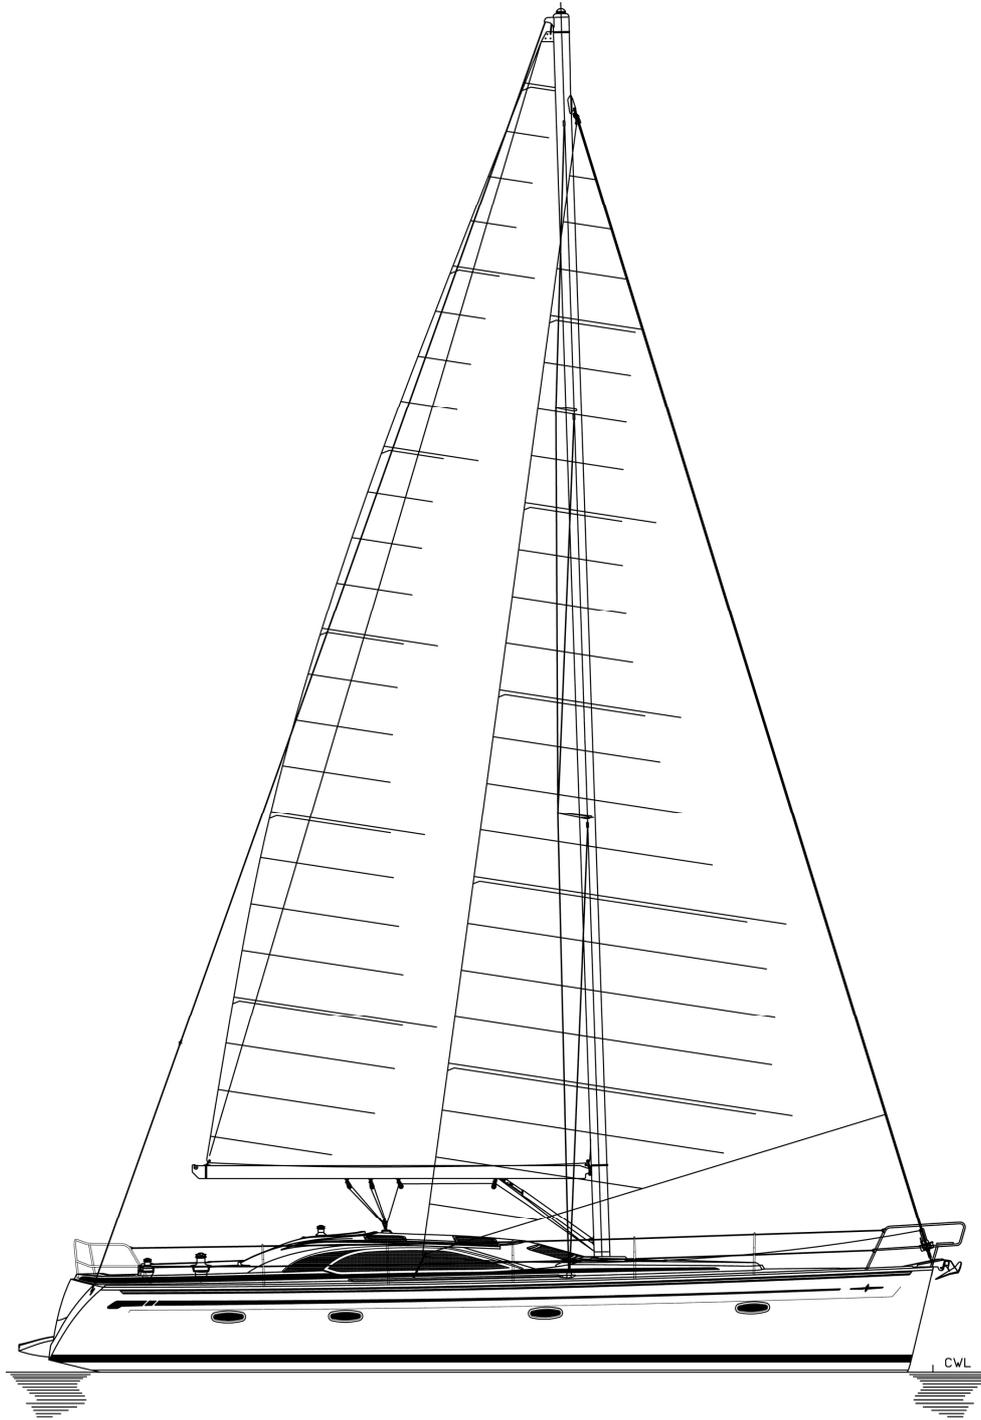

Reference


The valid measuring of the foresail reefing gear are on the enclosure note at the carton of the Furllex-foresail reefing gear.



Caution!


Do not enter the front salon windows and the deck hatch. Slip hazard!

1.2.2 Deck arrangement

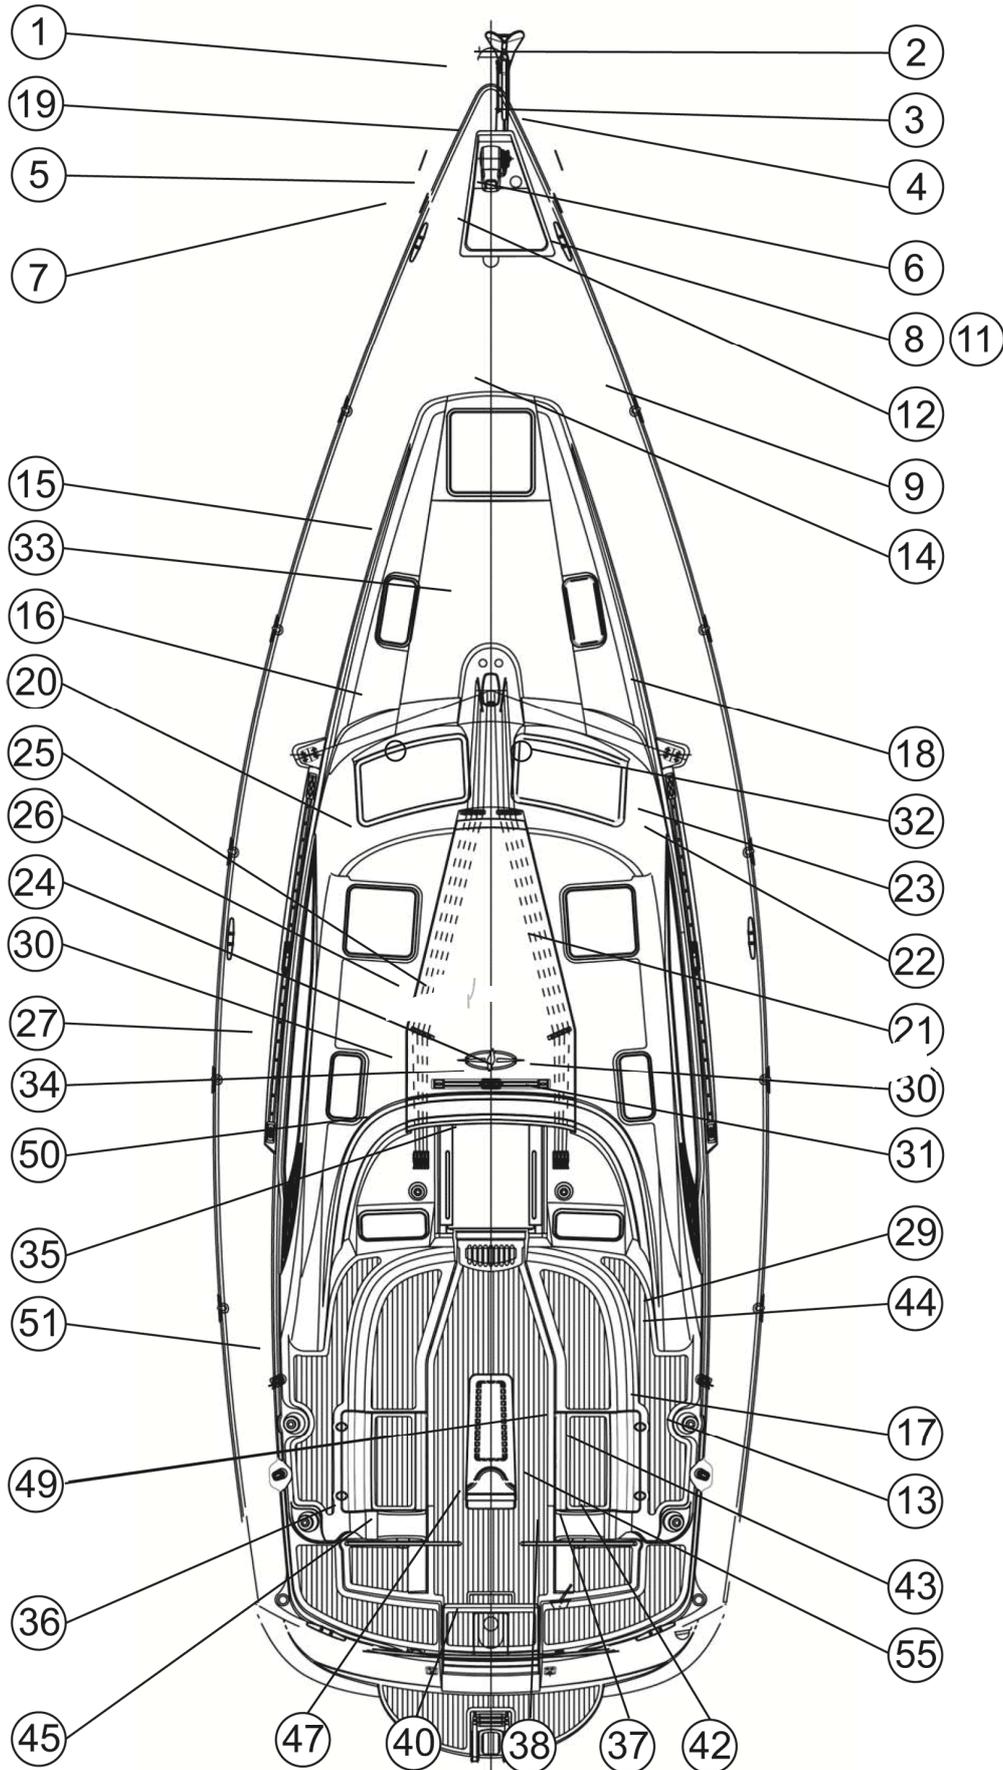

1	Bow navigation light	Zweifarbennleuchte
2	Bow fitting	Bugbeschlag
3	Bow pulpit	Bugkorb
4	Life lines	Relingsdurchzüge
5	Water inlet	Wasser Einfüllstutzen
6	Anchor chain bail	Ankerkasten
7	Mooring cleats	Belegklampe
8	Stanchion	Relingstütze
9	Toe rail	Fussreling
11	Stanchion base	Relingfuss
12	Spin. boom vang padeve	Deckauge
13	Fuel inlet	Diesel Einfüllstutzen
14	Op. hatch	Vorschiffsluke
15	Op. hatch	Vorschiffsluke
16	Portlight	Fenster
17	Spinnaker winch	Spinnaker Winde
18	Main shrows + aft kiwers cgk	Wantenpütting
19	Electric windlass	Elektrische Ankerwinde
20	Port light	Fenster
21	Deck organizer	Umlenkblöcke
22	Genoa track	Genoaschiene
23	Genoa track car	Genoaschlitten
24	Main sheet track	Grossschotschlitten
25	Main sheet track car	Grossschotschiene
26	Front end stop (g. track)	Schienenendstück
27	Aft end stop (g. track)	Schienenendstück mit Umlenkblöken
29	Genoa winch	Genuawinde
30	Stopper	Stopper
31	Winch	Fallwinde
32	Ventilator	Decklüfter
33	Cable penetration	Kabeldurchführung
34	Sliding hatch	Schiebeluke
35	Washboard	Steckschott
36	Aft port pushpit	Heckkorb links
37	Aft starboard pushpit	Heckkorb rechts
38	Backstay chain plate	Achterstagpütting
40	Boarding ladder	Badeleiter
42	Stern light	Hecklaterne
43	Hand operated bilge pump	Handlenzpumpe
44	Shore socket 230 V	Steckdose 230 V
45	Engine ventilation inlet	Belüftungsroste
47	Tiller	Notpinne
49	Steering wheel	Steuerrad
50	Cockpit port light	Cockpit Portlight
51	Foot block with lock off	Liegender Block mit Stopper
55	Steering pedestal with engine panel	Steuersäule m. Motorinstrumententafel

1.2.3. Accommodation plan

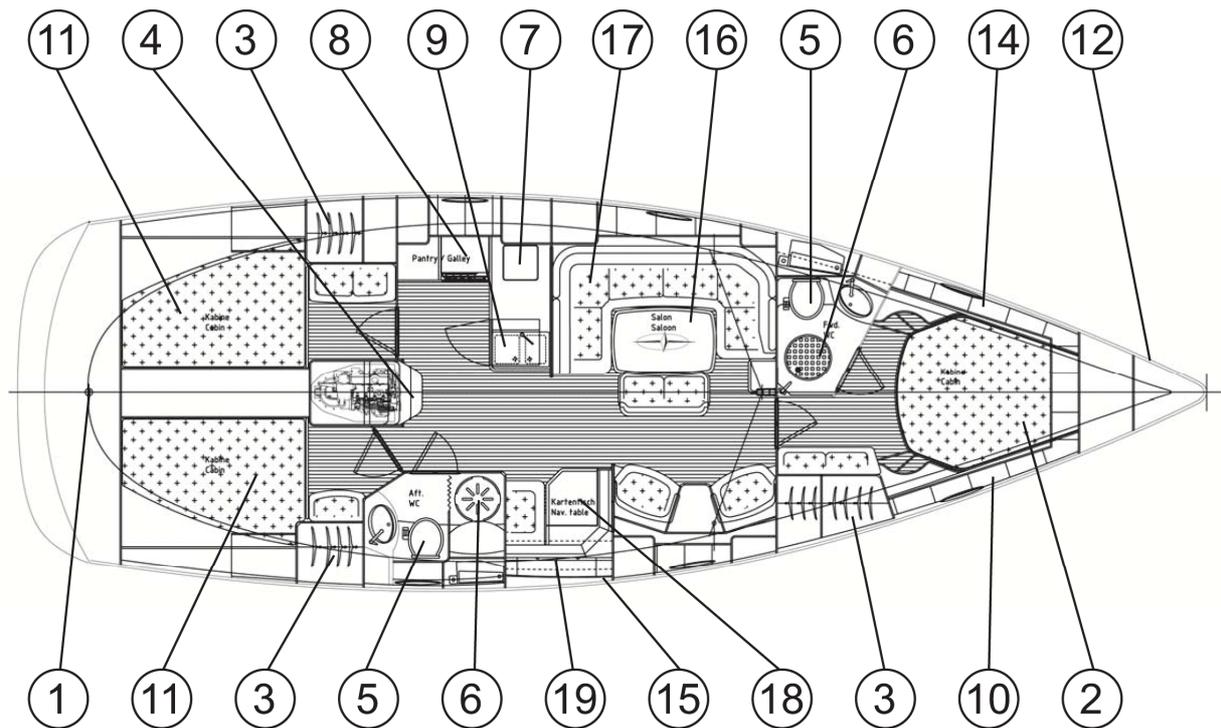

1	Steering gear	Ruderanlage
2	Double berth	Doppelbett
3	Shelf	Schrank
4	Companion way / engine room	Niedergang / Motorraum
5	Head	WC
6	Shower	Dusche
7	Cooling	Kühlbox
8	Gas cooker with oven	Gasbackofen
9	Sink	Spüle
10	Hanging locker	Hängeschrank
11	Double berth	Doppelbett
12	Chain locker	Ankerkasten
14	Hanging locker	Hängeschrank
15	Book locker	Bücherschapp
16	Saloon table	Salontisch
17	Seating	Sitzgruppe
18	Chart table	Kartentisch
19	Electrical switch panel	Elektrische Schalttafel

1.3 Drive systems

1.3.1 Sails

The SY Bavaria 44vision is equipped with the following standard sails:

Main sail - fully-battened	abt 54,40 sqm
Main sail " - mast reefing gear	abt 47,30 sqm
Furling Genoa	abt 58,80 sqm

1.3.2 Rigging

Mast

LM- Profile, without taper; – 20 deg. double spreaders , angular; - 2 halyards, topping- and boom lifts, Tipping line and fittings.

Boom

- LM-Profile; - clew outhaul; - 2 reefing lines; - eye for mainsheet; - eye for tipping line.

Standing rigging (made of 1x19–lace, material 4401), consisting of:

forestay with excessive footage (headsail reef system)	1 x	upper shroud	2 x
permanent backstay with bridle	1 x	lower shroud	2 x
permanent backstay tackle	1 x	intermediate shroud	2 x

Running Rigging

Inside the mast:

- Main halyard
- Genoa halyard
- Boom lift

Option:

- Spinnaker halyard (attached)
- Spinnaker uphaul
- Spinnaker downhaul

Inside the boom: 2 reef lacings (battened sail); 1 foot jig

Complementing we refer onto the enclosed trim instructions of the manufacturer.



Caution

Before of every sail:

- Test strings, cordage, lanyards and split pins.
- Safeguard the split pins through adhesive tape or bending.
- Transpose deformed or damaged bolts.

1.3.3 Motorising, engine room, gear, and propeller

This yacht is equipped with a inboard diesel engine with a sail-drive gear and a fixed propeller (option: folded propeller).


The engine room is separated from living quarters by plywood-bulkheads covered with sound-insulating material.

An access is possible through:

- a shutter below the companion way,
- detachable bulkhead in the aft cabin beside the engine room

Cooling-water supply to the engine is realised via the sail drive-gear.

Engine plant

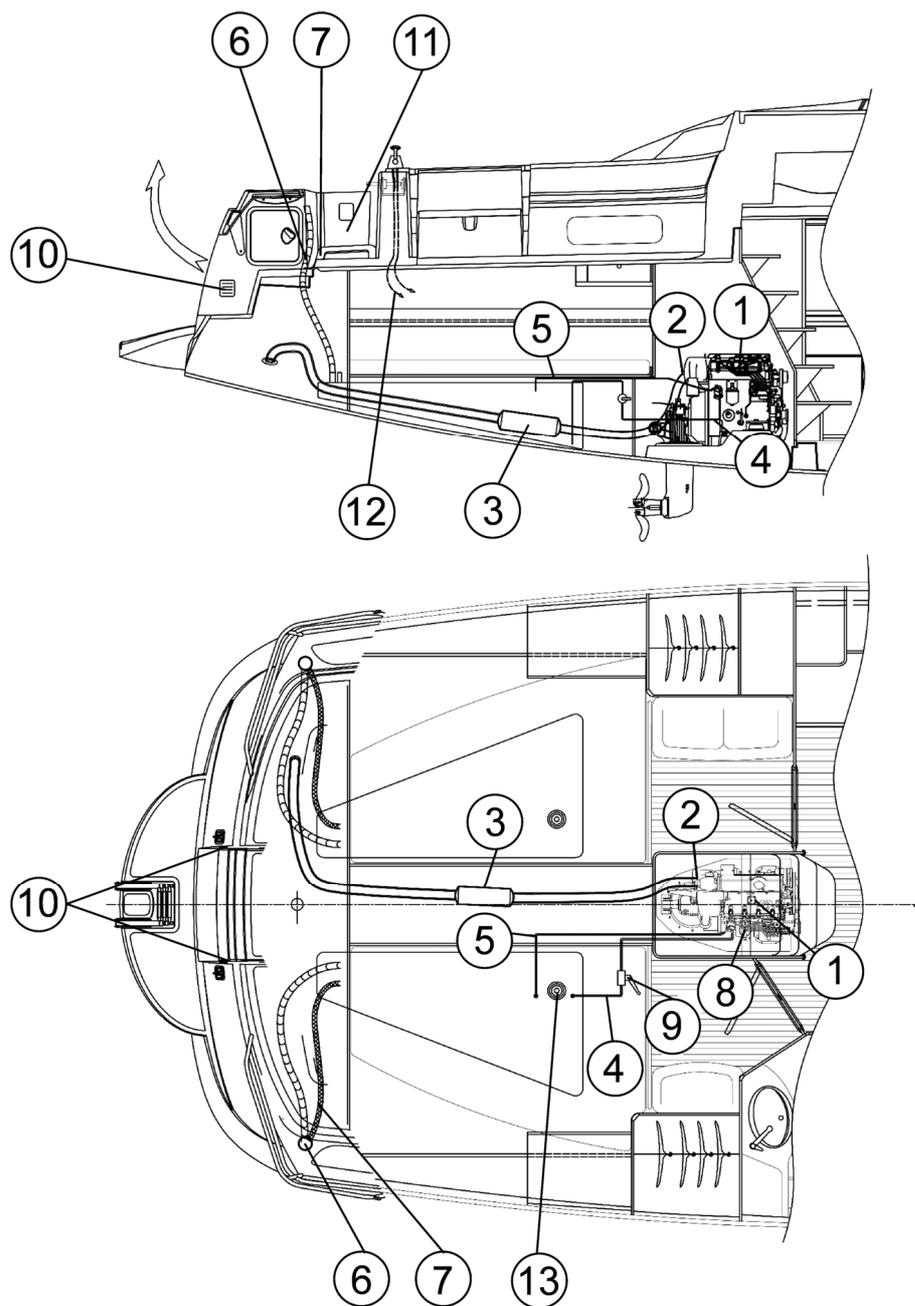

1	Engine Volvo	Motor Volvo
2	Engine exhaust system	Motorauspuffsystem
3	Exhaust water lock	Abgaswassersammler
4	Engine fuel intake	Kraftstoffzulauf
5	Feed back fuel	Kraftstoffrückführung
6	Fuel tank filling hose	Kraftstoffeinfüllstutzen
7	Fuel tank ventilator	Tankentlüftung
8	Fuel filter	Kraftstofffilter
9	Fuel cock	Kraftstoffabsperrhahn
10	Ventilator grille	Belüftungsroste
11	Engine panel	Motorinstrumententafel
12	Engine control cables	Motor-Fernbedienungskabel
13	Fuel gauge	Vorratgeber für Kraftstofftank

2. Installations and circuits

2.1 Tanks and piping - water


2.1.1 Fresh water, drinking water –cold

The yacht has two water tanks with a capacity of altogether about 460 l. Fresh water is supplied via a water inlet (with a blue cover) at the transom, port side and on the forecabin near the chain locker. You can take water from the tank over a hose connection leading to the pressure water-pump.

This pump, realising the complete cold water circulation, is fitted in the head. An interruption of the operation of the pressure pump is done by cutting off all ducts. All pipes/hoses should be checked for leaks if the pump continuous working though all ducts were cut off properly.

The pump is protected by a filter which should be regularly checked and cleaned if necessary.

Components:

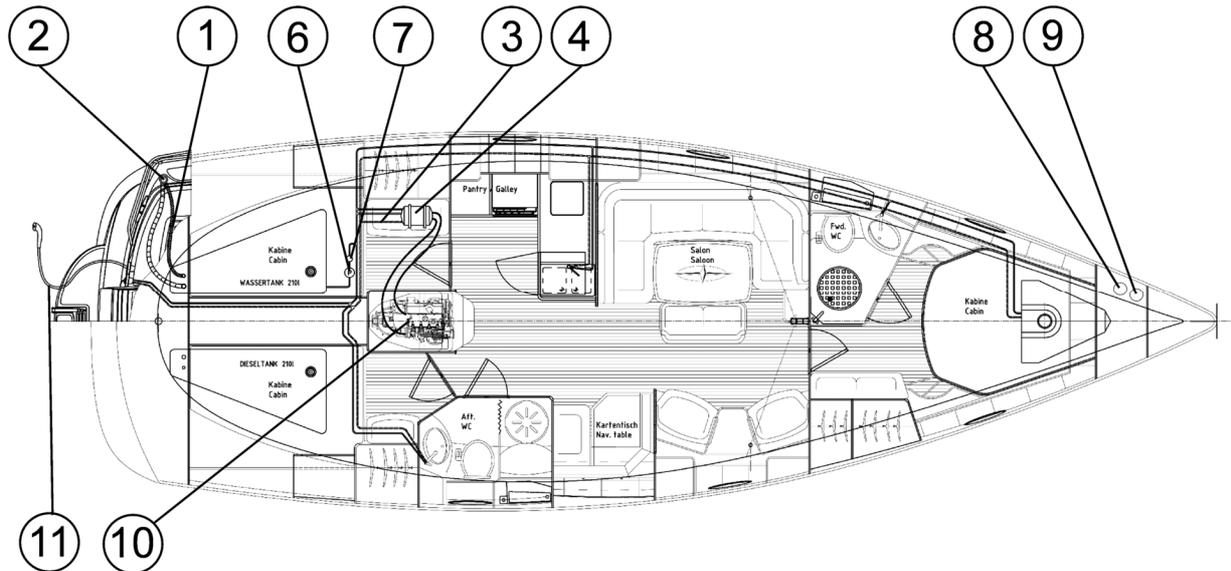

1	Tank venting	Tankentlüftung
2	Deck plate (inlet)	Einfüllstutzen
3	Return water heater	Rücklauf Boiler
4	Water heater	Boiler
6	Fresh water pump	Frischwasserpumpe
7	Accumulator tank and pressure switch	Druckgefäß und Druckschalter
8	Tank venting	Tankentlüftung
9	Deck plate (inlet)	Einfüllstutzen
10	Engine circular	Motorkreislauf
11	Shower	Cockpitdusche



Note

Exchange the water in tank from time to time.
Additionally you should use common purifiers.

2.1.2 Sea-water circulation


Sea-water is necessary for both WC flushing and engine cooling (see: 2.9).

2.1.3 WC –installation: see enclosed directions for use



Attention
If you are not aboard for a longer time you should close all sea-valves.

Components: WC-flushing:

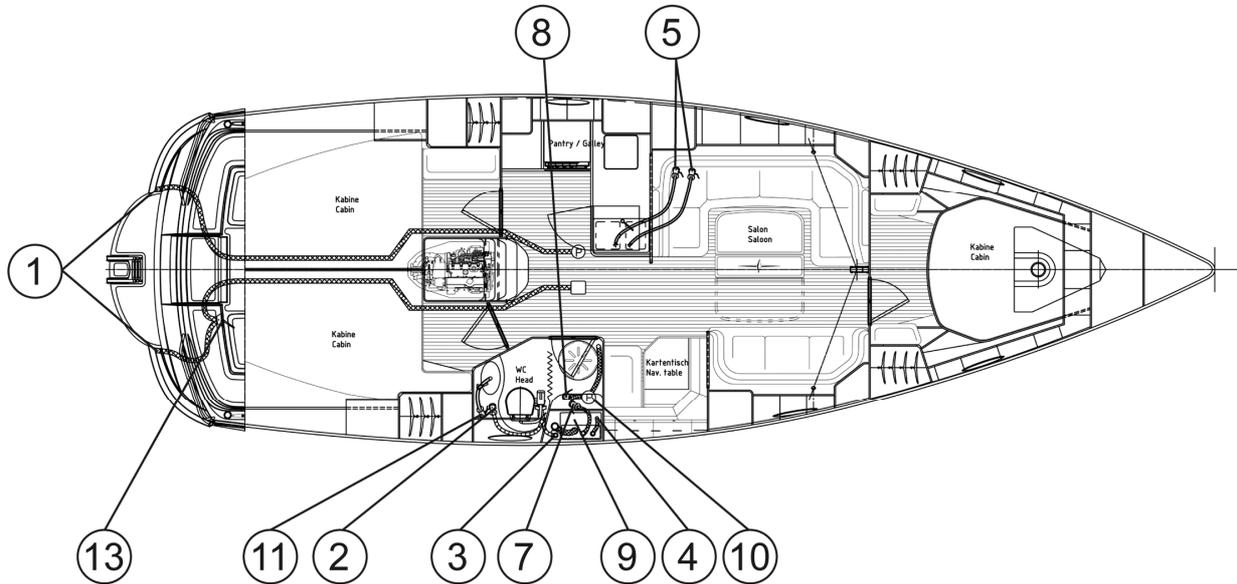

1	Outlet	Borddurchlass
2	Toilet water drain valve	Kugelhahn Eingang WC
3	Toilet drain	Ausgang WC
4	Waste water tank venting	Fäkalientankentlüftung
5	Basin drain valve	Kugelhahn Ausgang Waschbecken
7	Waste water drain valve	Kugelhahn Ausgang Fäkalientank
8	El. shower drain pump valve	Kugelhahn Ausgang El. Duschpumpe
9	Waste water tank	Fäkalientank
10	Shower drain pump	el. Duschpumpe
11	Sink drain valve	Kugelhahn Ausgang Spüle
13	Hand operated bilge pump	Handlenzpumpe

2.2 Tanks and piping - fuel

Storage tank

There is a 210 l plastic diesel tank with an inspection opening on starboard-side below the aft berths. It is filled via a fuel inlet with a chrome cover (marked with DIESEL) at the transom of the yacht. The tank pickup is situated on the tank. The supply is made of a fire-proof fuel hose according to ISO 7840. The vent line is led to above deck.

Supply of the engine

The engine is supplied via a suction pipe from the upper edge of the tank. Due to the short distance a fire proof fuel pipe is used throughout. This is led via a wide-meshed filter/ water separator, fuel pump and fine filter to the engine and then back to the tank.

**Attention**

A trouble free operation of the engine and heating is only possible, if the fuel is clean. That's why a regular inspection and cleaning of filter/water separator is unavoidable. The fuel tank should be completely emptied and cleaned once a year.

**Warning**

When refilling the tank:

- Switch off the engine, heating and stove!
- Do not smoke or use open lights!

2.3 Steering gear

2.3.1 Description of the system

The rudder is a suspended, balanced hydrofoil mid ship rudder. It is operated by hand from the steering wheel at the steering post in the cockpit. Transmission of power is realised by means of Bowden control to the rudder quadrant. With the autopilot (option) there is an electric motor installed.

2.3.2 Rudder blade and rudder bearings

The rudder blade is a profiled one. It consists of a FRP-body. The rudder post with a diameter of 60mm is made of a sea-water resistant aluminium alloy and is laminated into the blade. The post runs in two easy-going and special rudder bearings. The rudder is fixed by a mounting clip at the upper end of the post that also serves for the keeping of the rudder tiller.

The mounting clip is additionally secured with a straight stud bolt on the rudder post.

**Attention**

Check regularly and repair if necessary tight hold of the mounting clip on the rudder post.

The rudder bearings used by **BAVARIA YACHTBAU** are self-setting bearings. Since rudder bearings are subject to wear and tear they should be inspected and maintained regularly.

Emergency tiller

The emergency tiller is stored in the starboard locker seat.

In case of emergency remove the steering wheel, the rudder quadrant for rope pulls and the quadrant for the auto pilot (option).

Moreover the rudder head-cover has to be removed and the emergency tiller to be mounted and secured.



Attention

Remove timing gear while using the emergency tiller



Attention



Please ensure a suitable bearing lubrication of the necessary parts of the rudder installation with water-proof lubricants (or Teflon).

Bearing clearance has to be avoided and can be adjusted at the top bearing.

The post must have no clearance but should not need heavy movements.

You can brake or even fix the steering wheel by turning a screw home. Make always sure that this brake is not drawn especially when sailing with the auto pilot. This would mean an overload for the electric motor.

The socket of the steering gear is integrated into the deck's form. On the socket there is the casing of the wheel hub. A chain is laid over a tooth-wheel of the hub.

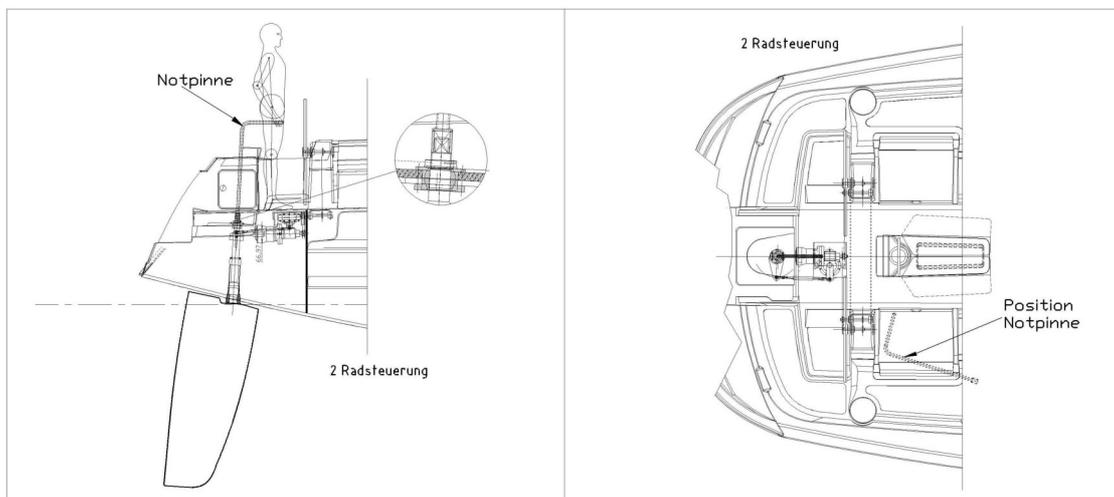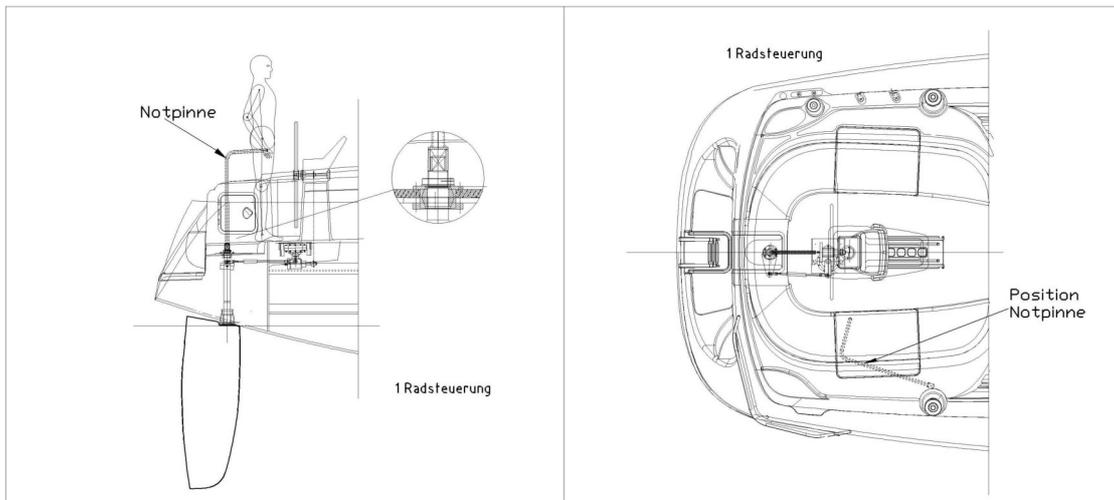

2.4. Bilge pumps, bilge pipes

The chain locker is made watertight against the yacht. It is self-bailing through two holes in the skin.

All **BAVARIA** yachts have got a self-bailing cockpit, too. The Water in the cockpit runs by the abaft trim to the back through the aperture.

2.4.1 Description of the pumping arrangement

At **BAVARIA** Yachts the cockpit is self bailing. Both strainers are in the Bilge in the deepest place in the fair range. The soil bulkheads in the fair are connected by drillings, so that with possible water break-down both pumps can be used. The baillines are shifted by means of hose after aft to the mirror (withdrawal).

The cockpit bailing is made by the passage at the mirror (under the attendant seat).

In the anchor box are on both sides bilge openings, which are covered with a screen. In addition your yacht is equipped with a hand spring pump as well as an electrical bilge pump (achievement 75 l/min.).

With employment of the hand spring pump the pumping lever of the pump is to be pulled out. The spring procedure is made by pumping movements.

The electrical bilge pump is started by manipulation of the symbolically marked switch at the panel. - before in any case also main switch turns on –

We recommend to use the electrical bilge pump only with working machine; the full achievement of the electrical bilge pump will be reached then.

A draw bucket is an ideal means for bailing out water. It should always be ready in a cockpit seat locker.



Warning

In a serious situation, e.g. in case of a heavy inrush of water as a consequence of a collision, the pumping capacity might not be sufficient. Take measures for damage control with collision mats or other suitable means.



Attention

Close all sea valves if you leave your yacht for a longer period. Valves being not clearly visible, like e.g. in the toilet room, should only be opened before use and closed short after.

Leakage-pot

For the case of a damage of a seacock or an on-board passage we recommend to carry on the yacht leakage potting from soft wood, whose diameter is co-ordinated with the different sizes of the on-board passages and can with those each opening be locked surely



Note

In case of spherical valves a transverse lever-direction indicates: CLOSED
And a longitudinal ones means: OPEN

Maintenance note

The tightness of ducts should be inspected regularly.
Retighten all hose clips and the stuffing boxes of valves

Components of the bilge pumping installation: See pic. 2.1.3

2.5 The electric installation

2.5.1 The AC-installation

The yacht has got a shore connection (option) by which it can be supplied with electric power from ashore when being berthed in a port. The plug box (meeting the CEE-norm) is installed at the transom of the yacht. The power is supplied into a shore connection unit, placed under the chart table.

The plug box is operational as soon as the shore supply cable has been plugged in. It only serves the operation of electric machines

2.5.2 The DC-board net

All electric devices aboard are supplied with the 12 V DC. A main-switch is installed in the electric panel at the chart table. Power distribution is effected by a switchboard above the chart table. The lettering next to each switch refers to the corresponding consumer.

You can find all the switches for the 12 V consumers at the switchboard. By this you can operate different consumer-groups, being marked with logos or lettering, separately. Some of the switches are designed for an installation of additional electric devices. There are only flatconnector fuses used. If a fuse break repeatedly down you should spot the cause or consult a specialist (electrician). In case of failure the safety devices must be changed.

2.5.3 Operating the installation and specific features

The combination of an AC- with a DC installation offers a clearly higher comfort but requires some special knowledge.

Charging the batteries

All batteries are maintenance-poor and drain-protected. They are charged via a buffer diode by the motor-generator. Charging the starter battery always takes priority to ensure a safe start of the engine.

AC-consumers

The only fixed link is the one to the battery charger. The safety contact plug-box at the electric panel is designed for electric tools to be used for small repair work.

DC-consumers

The essential consumers are:

- | | |
|-----------------------------|---------------------|
| - navigation lights | -bilge pumps |
| - engine displays | -tank display |
| - VHF-radio wiring (option) | -electronic devices |
| - devices for comfort | |

Navigation lights have absolute priority. In case of a lack of capacity all other consumers have to be switched off first. By a stand-by operation of the engine, even when under sail, the batteries can be brought up rather quickly. After a while you can switch on the other consumers again.

2.5.4 Important warnings on the DC-installation



Attention

You should never

- work at the electric installation if it is in operation,
- alter fuses or overload switches,
- change the electric wiring and/or wiring plans; this has to be done by specialists only,
- install electric devices or add parts that exceed the allowed load limit,
- leave the yacht unattended with the electric installation in operation. This does not go for automatic bilge pumps, fire protection and –alarm devices.
- As long as the diesel engine is in operation, you must not disconnect the 12 V charging circuit.

Before starting a voyage you should always check

- the battery voltage,
 - the correct function of navigation lights .
- Have spare lamps for all navigation lights aboard.

2.5.5 Important warnings on the AC-installation



Attention

- the electric wiring of the yacht and/or corresponding wiring plans must not be changed.
- Service and maintenance must be carried out by a qualified specialist.
- Separate the shore connection cable in the unused condition from the land connection

Warning


To avoid the danger of a rush of current or fire:

- The shore connection cable must never hang into water.
- Plug the shore connection cable first aboard and then ashore.
- Do not alter plugs of shore connection cables

Disconnecting the shore connection cable:

First disconnect the shore connection cable ashore and then aboard.

2.5.6 Distribution of electric devices:

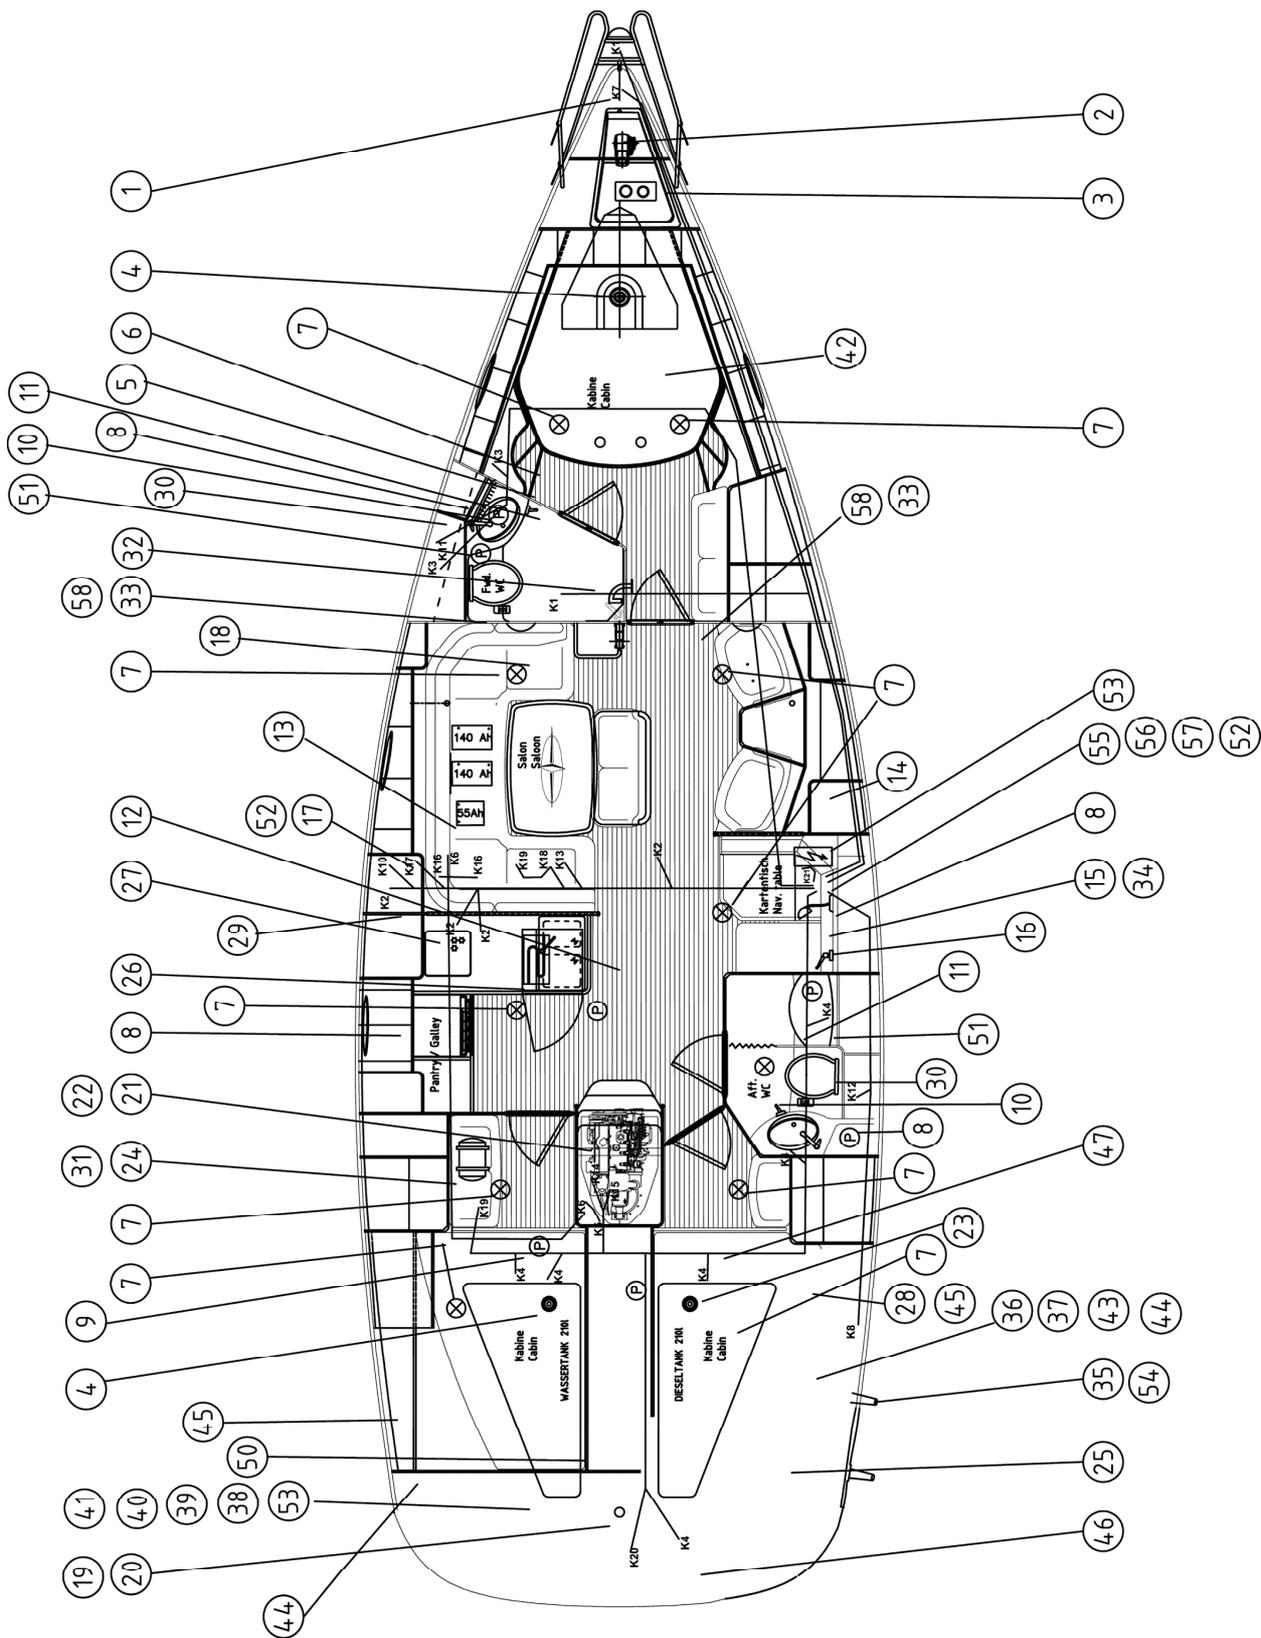

1	Zweifarbennleuchte	Navigation light
2	Elektrische Ankerwinde	Electric windlass
3	Bedienteil Ankerwinde	Windlass switch
4	Frischwassertankgeber	Fresh water gauge
5	Echolot Geber	Echo sounder
6	Sumlog Geber	Log
7	Halogenleuchten	Light
8	Neonleuchten	Neon lamp
9	Wasserpumpe	Water pump
10	Duschpumpe	Shower drain pump
11	Duschschalter	Shower drain switch
12	Elektrische Lenzpumpe	Bilge pump
13	Batterien	Batteries
14	Batterie Ladegerät	Battery charger
15	Elektro Panel	Electric panel
16	Hauptschalter (Motor/Verbraucher)	Main switch (engine/consumer)
17	Kurscomputer Auto - Optional	Auto pilot – option
18	Kompass Auto - Optional	Compass – option
19	Rückholgeber Auto - Optional	Repeater – option
20	Motor Auto - Optional	Auto engine – option
21	Anlasser Motor	Engine start
22	Gleichrichter	Detector
23	Dieseltankgeber	Fuel tank gauge
24	Boiler	Water heater
25	Heckleuchte	Stern light
26	Kühlschrank	Refrigerator
27	Kühlaggregat	Cooling unit
28	Landanschluss 230 V	Shore socket 230 V
29	Steckdose Küche 230 V	Socket 230 V
30	Steckdose Duschaum 230 V	Socket 230 V
31	Steckdose Boiler	Socket 230 V
32	Kabeldurchführung	Cable penetration
33	Lautsprecher - Optional	Speaker -option
34	Radio - Optional	Radio – option
35	Antennenkabel Radio – Optional	Radio antenna - option
36	Motor Panel	Engine panel
37	Tankuhr	Tank gauge
38	Tridata Bedienteil	Tridata unit
39	Wind Bedienteil	Wind gauge
40	Auto 6001 Bedienteil - Optional	6001 unit - option
41	Kompass	Compass
42	Bugstrahlruder motor – Optional	Bow thrusters engine - option
43	Steuerung Bugstrahlruder - Optional	Bow thrusters unit – option
44	Genuawinsch Bedienteil - Optional	Genua winsh unit – option
45	Genuawinschen Motor - Optional	Genua winsh motor – option
46	Heizung – Optional	Heater – option
47	Dieselpumpe Heizung - Optional	Heater fuel pump – option
48	Thermostat Heizung – Optional	Heater thermostat – option
49	Fühler Heizung – Optional	Heater gauge – option
50	Generator – Optional	Generator - option
51	Fäkalientankgeber	Waste water tank gauge
52	Sicherung	Fuse
53	Kartenplotter	Map plotter
54	GPS Antenne	GPS antenna
55	Relais Autopilot	Relay
56	Sicherung Ladegerät	Fuse battery charger
57	Ankerspillrelais	Relay anchor winch
58	Lampe	Lamp

2.5.7 Wiring plans

2.5.8 Distribution plans

2.5.9 AC-distribution

See provided e-documentation


2.6 L.P.G. installation

The gas installation for the stove meets the European norm EN 10239. The test-certificate is attached.

The gas pipe leading to the stove from the standard 3 kg-gas cylinder is an 8 mm copper pipe. It is placed into a self-bailing casing moulded into the deck in the rear cockpit area. All gas pipes have been installed according to the German safety regulations. The best-by date for the soft connection hoses between the gas cylinder and the copper pipe and between copper pipe and stove is printed onto the hoses. They have to be replaced after the expiry date.

The reducing valve in the gas cylinder casing has a service pressure of 30 mbar. The flow rate is 1 kg/h.

2.6.1 The components

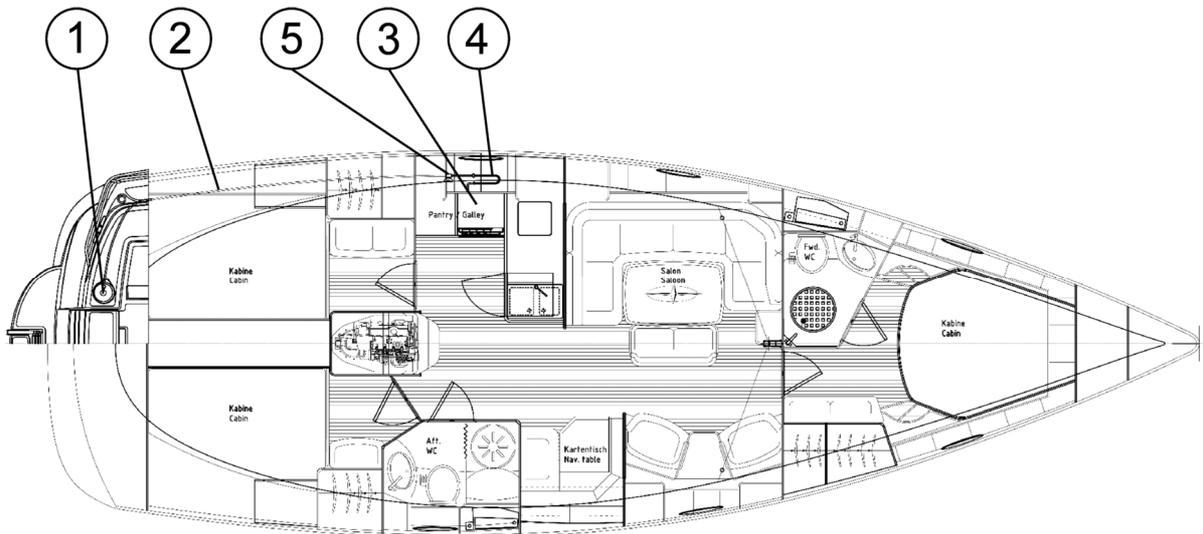

1	Gas tank with valve	Gasflasche mit Reduzierventil
2	Copper tube	Kupferrohr
3	Gas stove with oven	Gaskocher mit Backofen
4	Rubber hose	Gummischlauch
5	Gas stopp cock	Gaskugelhahn

2.6.2 Operation

Gas installations require care. That's why you should follow this sequence:



Attention

Open the stop valve in the gas cylinder casing
 Open the valve before the stove
 Open a stove valve and lighten the gas
 Keep the valve open until the glow timer allows further burning.



Attention

For finishing follow the same (above mentioned) sequence from the valve in the gas cylinder casing to the stove valve to allow all gas in the piping to escape and burn.



Attention:

- Do not use liquids containing ammonia for checking the pipe.
- Never handle with open light and do not smoke if you look for Leakage or if you connect a new gas cylinder.

And here is some more advice on how to prevent difficulties with the gas installation:

- Close all gas valves if the stove is not in use. In a case of emergency you should close the valves immediately.
- The stove valves have to be closed before the gas cylinder valve is opened.
- Check the L.P.G. installation for possible leakages regularly. Check all connections with soap suds or the like (for doing so the stove valves have to be closed – all other valves of the installation have to be open).
- If you find any leakages close all valves and have the installation repaired by a specialist before further use.
- Since the flames consume oxygen a proper airing and de-aeration is necessary. Do not use the stove for heating the cabin.
- Valves of empty gas cylinders have to be closed and disconnected from the installation. Have the covers ready.
- Do not use the gas cylinder casing for storing other equipment.
- Never leave your yacht unattended if the stove is in use.
- Check the hose pipes at least once a year. Let these periodically replace.
- If you install a new stove make sure that it has got the same working pressure.
- Check the exhaust gas pipes at least once a year. Replace them if they are defective.

2.7 Fire protection

When building the yacht special attention was paid to avoid the risks of fire. This includes the choice of materials, the distance of stove flames to the surrounding built-in furniture and an island position of the engine. The engine room has got a lining with fire resistant insulating material.

As the owner of the yacht you should keep this state and pay attention to the following advice:



Attention:

Keep the bilge clean and check regularly if there is a smell of fuels or gas.

Do not have any freely suspended curtains above or close to the stove or other devices with open fire.

Inflammable material must not be stored in the engine room. If you store non-inflammable materials in the engine room make sure that they are protected against falling into the engine installation or are in the way.

Furthermore you and your crew can support fire protection if you follow the following advice:



Never

- obstruct any exits or hatches.
- alter safety installations like fuel- and gas valves and electric switches and the like.
- leave the yacht unattended if the stove or the heating is in use.

Never

- use gas lights in the yacht.
- fuel the tank or replace gas cylinders if the engine is running or if the stove or heating is used.
- smoke or use open lights while handling with fuel or gas.

The well-known sources of danger on board are

- the stove in the pantry and
- the engine room.

If, despite all precautionary measures, a fire should break out aboard, there are three fire extinguishers on board which are fixed at the following places:

Nr. 1: **Powder extinguisher** at the port locker seat, at least fire grade 10A/68B

Nr. 2: **Powder extinguisher** at the starboard locker seat, at least fire grade 10A/68B

Nr. 3: **Powder extinguisher** under the stairs, at least fire grade 10A/68B

Additionally you should place in the pantry a light **fire retarding cloth**, which is made of glass cloth and is very useful in the case of fire caused by overheat fat.

It is the yacht owners duty

- to have all fire extinguishers regularly checked and maintained ;
- to have fire extinguishers replaced after the expiry date. The same goes if the extinguishers should have been used. The new extinguishers should at least have the same capacity as the discussed ones.

It is the yacht owners or skippers duty

To make sure that

- all extinguishers are freely accessible
- to inform all persons on board about:
 - the position and use of all fire extinguishers and the fire retarding cloth,
 - the position and function of the opening for the extinguishers nozzle in the engine room bulkhead,
 - the exit through the escape hatch above the fore-berths.

**Caution**

Test the fire extinguishers regularly!
 Train yourself as regards fire fighting.
 Always obey seaman's duty!

2.8 Anchor (option)

The bower anchor (plough anchor), about 21 kg, hot-galvanised, is known for its high holding power. It lays ready-to-fall in an anchor stowage device and is secured with a bolt. The chain has a length of 50 m and a nominal thickness of 10 mm. It is run out by an electric anchor windlass operated with a remote control. The remote control is placed in the chain locker before use and its function is activated at the switch board.

Furthermore it is recommendable to have a stern anchor as well as sufficient mooring- and towing lines with the necessary strength on board.

1 stern folding anchor (4-fluke grapnel anchor), 12 kg, hot-galvanised, fixed at the aft guard-rail. 6m chain forerunner, thickness 7 mm, 34 m polyamide anchor rope, 18 mm, 3-strand hawser laid. It is stored in the port transom seat.

The rope is cleated aft.

2.9 Engine cooling system

Engine cooling

The engine has got a two-circuit cooling system. Water enters through the sail drive, is led to the heat exchanger and then injected into the exhaust gas pipe. Together with the exhaust gas the cooling sea water is exhausted via the silencer and the exhaust pipe at the stern. This guarantees a trouble-free engine operation. Moreover the engine noise is reduced.

All hose connections of the system are secured with double stainless steel clips.

**Attention**

- Check and clean the sea water filter in regular intervals, depending on the water quality.
- Before starting the engine make sure that the cooling water inlet is open.
- Have a short look into the engine room for possible leakage.
- When the engine is running it is highly recommendable to check regularly if cooling water is escaping with the exhaust gas.
- If the sea-cooling water cycle precipitates, the optical and acoustic warning responds. Turn in this case engine off immediately and check the cooling system.

2.10 Exhaust gas system

The yacht is fitted with a "wet" exhaust gas system, i.e. cooling sea water is injected into the exhaust gas elbow causing a cooling of exhaust gases. This mixture is led down into a silencer/water lock, runs through a pipe in the locker seat on the starboard side of the aft cabin, is led upwards at the stern and escapes to the side above the water-line.

The exhaust gas hose consists of a synthetic rubber material with an integrated steel spiral.

The hose is heat-resistant (for some time) and should be checked and replaced if necessary.

A constant flow of sea water has to be guaranteed. The hose is secured at its joints with two clips.

If there is an interruption of the sea water flow, the temperature sensor in the exhaust gas hose will release an visual and acoustic warning. In this event you should stop and switch off the engine immediately until the problem has been settled (see manual of the engine manufacturer).

**Attention**

A regular Inspection if saltwater comes out of the exhaust is urgently advisable.

2.11 Ventilation/Airing

We have taken the following measures for a proper ventilation of all rooms:

Chain locker

Certain ventilation is achieved through the hawser port in the cover of the chain locker and through its bilge holes.

Living cabins/ Salon and forward quarter

1 escape hatch, 4 folding windows, 2 folding hatches, 2 cover exhausts

Aft cabin

2 side light showing to the cockpit

Components:

1 deck ventilator, 6 side lights, 2 folding hatches

2.12 Board ducts, sea water valves

Openings below the water line are possible weak spots. That is why we pay special attention to them.

All board ducts in the underwater part, with the exception of the duct for the transmitter of the echo sounder, consist of brass-made screwed joints with spherical sea valves and hose nipples. All hose connections are secured with two clips each.

**Attention**

Close all sea valves if you leave the yacht for a longer time. Valves being not clearly visible, like e.g. in the toilet room, should only be opened for use.


**Maintenance note**

The tightness of board ducts should be inspected regularly.
Check and retighten all hose clips and stuffing boxes of valves if necessary.

**Note**

In case of spherical valves a transverse lever-direction indicates : CLOSED
And a longitudinal direction means: OPEN.

Board ducts

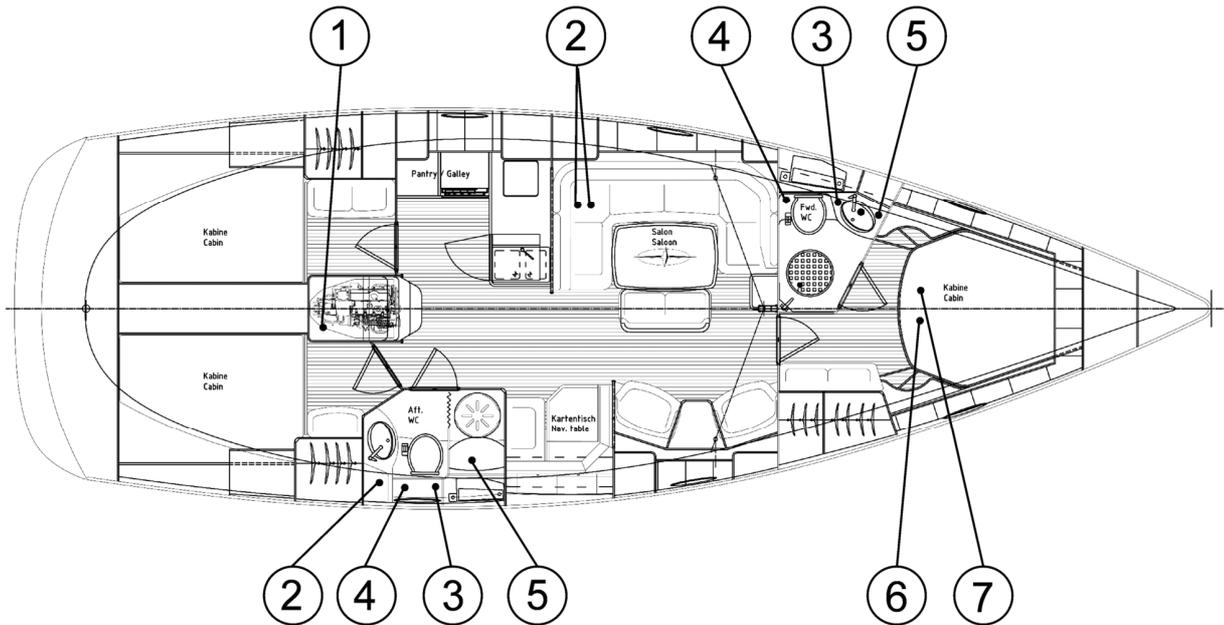

1	Cooling water strainer/ Water inlet	Kühlwasserfilter/ Kühlwassereinlass
2	Sink drain	Ausgang Spüle
3	Waste water drain	Ausgang Fäkalientank
4	Toilet water drain	Eingang WC
5	Shower drain pump	Ausgang Duschkpumpe
6	Echo sounder	Echolot
7	Log	Geschwindigkeitsmesser

2.13 Generator (Option for 44vision, 50vision, 50 Cruiser)

**Attention**

For maintenance and care on a regularly basis of e.g. oil level, filter, etc. see manual.

3. Environmental protection

BAVARIA YACHTBAU has already met the legal requirements referring to exhaust gas regulations with its choice for the inboard diesel installed. An exhaust gas type-examination certificate can be handed in or sent on later.

3.1 Fuel and oil

You should be especially careful when filling the tank. A (wet) cloth around the fuel inlet can prevent fuel from dripping into water. In your engine manual you can also find a diagram with a curve about the specific fuel consumption thus offering you some good hint on the most favourable engine speed.

For a necessary exchange of oil you should use a suction pump, because you cannot drain it off like a car. The oil has to be exchanged at least once a year, even in case of a little operation time of the engine.

A well-maintained engine should never leak. But in order to prevent even smallest amounts of oil being discharged overboard with the pumped out bilge water, the engine bed has been designed in form of a closed oil sump. All water from this sump, being possibly mixed with oil, has to be pumped into a separate canister and has to be deposited ashore.

In any case there should be oil-binders aboard.

3.2 Waste

For all water sportsmen it goes without saying: waste is not thrown overboard. This is also true for biodegradable waste. There should be a regular waste bag or –bin in a locker seat.

3.3 Sound

The wet exhaust pipe of the diesel engine reduces the engine sound considerably. Additionally rubber bearings, elastic couplings and the engine room insulation minimise sound emissions. Nevertheless you should not turn up the engine too quickly and, please, reduce the engine speed in waters with dense traffic.

3.4 Swell

Natural bank areas are sensitive against swell. Please keep sufficient berth. Formation of waves, caused by your yacht, is an indicator of where and when you should reduce your speed to avoid unnecessary swell. Pay attention to relevant signs.

3.5 Exhaust gas

Check the escaping exhaust gas regularly. The exhaust gas should show neither black smoke nor blue clouds. In such a case you should either clean the air filter or have a repair shop readjusted the engine.

3.6 Antifouling coatings

The underwater part of the hull of each yacht has to be protected with an antifouling coating because marine growth means more energy for propulsion. Today there is a wide range of protective paint with various effects for different bodies of water. Trust the recommendations of specialists for your decision. Coatings that are effective for years without any grinding in between are especially recommendable.

But if the coating has to be sanded to some extend you should arrange these activities with the port officials. Generally the ground under the yacht has to be covered with some plastic cloth to collect the rubbed down dust and dispose it.

3.7 Varnish removers

Most varnish removers contain aggressive substances and should not be used or as little as possible. A mechanical removal of paint is the much better way.

4. Maintenance

4.1 Maintenance, cleaning

Mast and rigging

See: Notes of the manufacturer

Sails

The sails are made of Dacron. This material is very robust and resistant. Thus the sails keep their form for a very long time.

Inspect all your running and standing rigging carefully for sharp edges, splints, protruding ends of wire and the like because laminated cloth is especially sensitive against touching them. Those parts of the cloth that can chafe at spreaders or shrouds should be protected on both sides by sticking self-adhesive cloth to them. The same goes for the foot of the sail if there is the possibility of chafing at the rails.



Note:

- Please remember: Damage to the cloth is mainly caused if it is incorrectly treated or handled. Especially if you let it shake, expose it to UV rays constantly or store it improperly.
- If there are any questions on the cloths do not hesitate to contact the manufacturer or your sail maker.
- Never remove track cars with ball bearings from the tracks carelessly. Always use sheet tracks with end stops.

Cleaning

Please clean your yacht immediately after you have taken it out of the water. High pressure cleaning devices will remove any growth. This is followed by an up keeping of the surface of the yacht. All paint manufacturers provide detailed instructions for their coating systems.

For ships sailing in salt waters: remains of salt absorb water and can cause a faster corrosion. Where- and whenever it is possible you should rinse the yacht and parts of it with fresh water.

Care and maintenance of teak decks

Untreated teak weathers to a natural silver-grey colour, with no detriment to the timber's strength or other mechanical/physical properties. Because of teak's inherent durability and weather-resistant properties, the use of protective paints or coatings is neither necessary nor advisable.

Practical tips on care and maintenance:

Protective wood care oils – penetrate deep into the timber, and under the influence of heat and moisture can adversely affect the adhesion of the caulking material to the sides of the joint. As a result, the seal between the caulking material and the sides of the joint may break down, allowing water to enter.

Paints and lacquers are decorative coatings which, when applied to a teak deck, dry to form a continuous film over the caulking material as well. Some paints will not dry properly where they come into contact with the caulking material, leaving the surface tacky. In time most paints will flake away along the line of the joint. This spoils the appearance of the teak deck and causes cracks to open up along the joints.

Teak cleaners should be used only if they contain no other active ingredients apart from normal soap. Additives such as phosphoric or oxalic acid, which are often incorporated as brighteners, are corrosive substances which attack both the caulking material and the timber, causing them to age rapidly.

We therefore recommend that teak decks be swabbed down with a mop and clean fresh water, to which a small quantity of normal soap may be added if desired. Heavy soiling may be removed by scrubbing with a hard sponge. The use of a power washer is not recommended. The *high-pressure water jet* will remove areas of sapwood and break the seal between the caulking material and the sides of the joint.

In extended periods of hot, dry weather teak decks should be watered at regular intervals to prevent the timber from drying out completely. Excessive loss of moisture will cause the timber to shrink, placing the joints under stress. Under unfavourable conditions this can lead to premature ageing or failure of the joint seal.

Stainless steel

The corrosion resistance of all fittings is based on their ability to constitute a thin skin together with the air oxidant, which makes a positive electrical potential. Specialists call it a CR-passive (CR is standing for chrome). But chrome is in the galvanic contact series negative and a bit less valuable than iron. If the thin protection skin is damaged the stainless CR will be active and less good than pure chrome. The corrosion can start.

Who is not disappointed about little brown spots on the fittings? They are caused by flying rust or particles of iron, which are in the air and in all harbours placed near big towns. As soon as the flying rust settles onto the protective coat of the stainless steel, it destroys the CR-passivity aggressively and fast.

Stainless steel only stays good looking for a long time, if there's taken good care of it.

Make it your habit, too also clean the rail stanchions, pulpits and push pits and all stainless fittings thoroughly too if you are washing your boat with clear water. Clear water will wash away the salt, rust and flying rust, the protective coat will be "ventilated" and it's function is guaranteed again.

If you have already brown spots, you can use most of all available metal cleanings to take care of the stainless steel fittings or you take normal polish like you use it for the hull.

Of course – all the best care can not help, if in the first place the fittings are not made out of the right material or the stainless steel has not been treated correct. Before you will buy the fitting, ask for example if the fitting has been polished electrical.

4.2 Wearing- and spare parts

As an experienced skipper you will not have difficulties in getting original spare parts. If you need any help, please contact the yard.

If you need any spare parts but cannot get the original ones you have to pay attention to the stability values to keep the yacht at the high technical standard it used to have at the time of delivery.

4.3 Repair work

Repairs at the hull (polyester full laminate and polyester sandwich laminate) can be implemented by a reliable workshop considering the general rules for the processing of polyester resin. The interior construction was designed in such a way that a non-destructive elimination of defects can be realised. In regard to the technical equipment you may contact a reliable workshop or your dealer, too.

4.4 Winter storage

We have already given some well-directed advice on winter storage in different paragraphs of this manual. Generally speaking all firms offering winter storage should meet the latest technological standard as far as environmental conditions, storage blocks, fire protection and accessibility of your yacht is concerned. Moreover there should be fixed rules for work, done by the owner himself, to prevent any interference with other sportsmen.

If possible the following objects should be taken from board and stored in a dry and frost-free place:

- Ship's papers and other relevant documents
- Charts, books and instruments
- Mattresses, upholstery, blankets and sleeping bags
- Sails and lines/ropes
- Foodstuffs
- Gas cylinders
- Safety equipment
- Life raft and rubber dinghy
- Batteries

Advice:**Before wintering you should pay special attention to the following parts and protect them correspondingly:**

- Rinse and clean the transmitters of the speedometer and echo sounder.
- Maintain the electrical systems and clean them with suitable materials.
- Water pipes can be successfully cleaned with soft acids, e.g. white vinegar.
- Water valves should be taken to pieces and greased.
- The toilet and corresponding pipes are cleaned with fresh water.
- The rudder should be fixed that no movements are possible (e.g. by fixing the tiller or wheel).

Engine:

- Fill the fuel tank completely
- Exchange the propeller's sacrificial anode (if necessary).
- Empty all cooling-water of the engine and follow the instructions of the manufacturer.
- Slacken all belts (lighting engine and other engine driven devices).

Winter storage

- Observe all notes in the engine manual.
- Store the fully charged batteries at a ventilated frost-free place.
- Grease the steering wire and –components
- Remove all water out of the ship and protect it against rainwater entering it.
- Replace all components which seem not to be reliable any longer.

Mast and rigging

It may not always be possible, but it is recommendable:

- Unship the mast,
- Refit all standing and running rigging,
- Inspect the cables and other wires,
- Inspect bolts, spanners and other tie points for possible fatigue of material or cracks,
- Rinse all aluminium parts with fresh water
- Rinse all lines/ropes with fresh water and store them in a dry place,
- Rinse and grease all guide rollers of the mast and the boom.

5. Final remarks and notes

This manual is in conformity with the directives of the harmonised European Norm EN 10240. Much of it might go without saying for you. Nevertheless we hope that dealing with the different chapters of this manual will help you to understand the technical systems and the ideas behind them. As already mentioned in the introduction, the purpose of this manual is to contribute to an unspoilt use of the yacht.

Among the things that are not dealt with is e.g. the personal safety equipment. This solely belongs to the responsibilities of the skipper. It goes without saying that there have to be means of rescue for all persons on board. But this also includes the procurement and maintenance of a life raft, of signalling means, a first-aid- as well as a tool-kit.

Since the European Recreational Craft Directive pays special attention to fire protection it shall also be mentioned, that fire extinguishers have to be maintained in regular intervals and that it belongs to the duties of a skipper to introduce his crew into their operation.

Those being prepared for an emergency are normally never involved. But just in case: the yacht is properly equipped for those situations with suitable means.

We are constantly working on further developments of our sailing yachts. We hope you will understand that we have to reserve the right to carry out changes as far as form, equipment and technology is concerned. For these reasons you cannot lay claim to a complete correspondence of your yacht with the information, figures and descriptions in this manual.

If your yacht should be equipped with any details not being referred to in this manual or in the owner's file, your party to the contract will inform you about the correct operation and maintenance.

Since all yachts, manufactured by **BAVARIA Yachtbau GmbH**, are exclusively sold by official dealers there is no contractual relationship between the yard and the customer/owner.

Thus **BAVARIA Yachtbau GmbH** is not familiar with details of the contract between the dealer and the customer. That's why it is not urgently necessary that your party to the contract takes over the full extent of our warranty conditions.

So, if you have to make a claim it is unavoidable to contact your party to the contract.